


# Safety Solutions from iOpen Pty Ltd

## Safety components which can be monitored

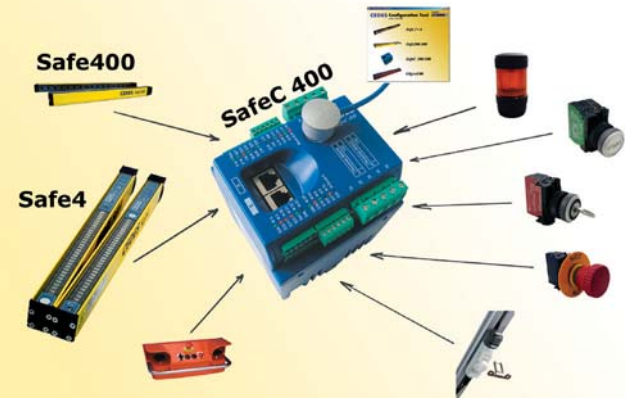

- Start button
- Override switch
- Override lamp
- Safe2+/Safe4
- Blanking-lamp
- Emergency stop
- EDM (ext dev monitoring)
- Two hand control
- (Height measuring)

## Measuring light curtain: *Object100*

- Length 50-1200 mm (Profile 20x15mm/Standard)
- Length 50-2200 mm (Profile Robust)
- Operation range 0...4m
- Max. cable length 10m
- Grid 10 mm / 25 mm
- Integrated LED display



## SAFETY CONFIGURATOR



- Simple graphical user interface
- Safety information integrated
- No programming language necessary
- Password protected configuration
- Diagnosis tool integrated
- Available free of charge
- Simple installation
- Optimized for a variety of users
- Optimizes service and maintenance work
- Internet and e-mail ready

## USB-OptiLink



iOpen Pty Ltd,  
10 Second Avenue,  
Unanderra NSW 2526

ph: 02 4272 1899

fx: 02 4271 4668

Email: sales@iopen.com.au

Sydney: 02 9543 3611 Melbourne: 03 9882 8900

